

541, 342

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
24 December 2003 (24.12.2003)

PCT

(10) International Publication Number
WO 03/106861 A1(51) International Patent Classification⁷: F16G 11/14,
11/12, B60P 7/08, B63B 21/04

(21) International Application Number: PCT/AU02/00789

(22) International Filing Date: 17 June 2002 (17.06.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant and

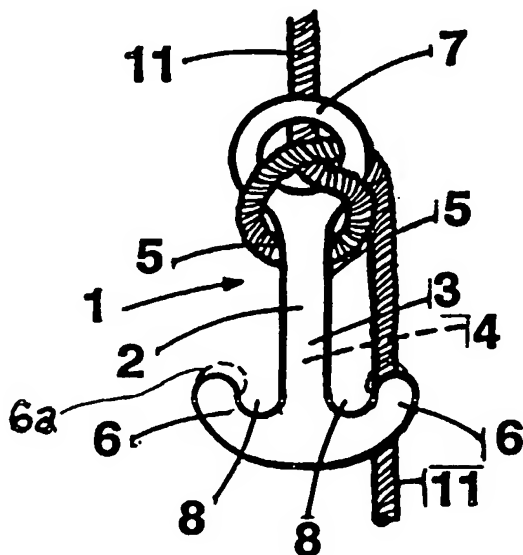
(72) Inventor: RADFORD, Wayne, Michael [AU/AU]; 29
Cathedral Avenue, Molendinar, Queensland 4214 (AU).(74) Agent: CULLEN & CO.; Level 26, 239 George Street,
Brisbane, Queensland 4000 (AU).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: ROPE HITCH

(57) Abstract: A unitary hitch (1) comprises an elongated shank
(2) having front (3), rear (4) and side (5) faces, a pair of hooks (6)
at one end of the shank (2) and a closed eyelet (7) at the other end
of the shank (2), wherein the hooks (6) extend from opposite side
faces (5) of the shank (2) and the hooks (6) are coplanar with the
eyelet (7). A method of using the rope hitch (1) is also described.

WO 03/106861 A1